


## Solar Garden Light

SLL-017A

12  
Watts



### PARAMETERS

ITEM NO

GLS-7217AX

<b>Solar Panel</b>	18V/28W Monocrystalline Solar Panel. Grade A
<b>LED</b>	12W, 10*18mil Epistar Chip
<b>Lifespan of LED</b>	More than 50,000 hours
<b>Luminous Flux</b>	1200lm~1320lm
<b>Color Temperature</b>	3500~7500K
<b>Beam Angle</b>	120°
<b>Battery</b>	12V/12AH Li-ion Lithium Battery 12.8V/10AH LiFePO4 Lithium Battery
<b>Discharging Time</b>	18h (100% power) 42h(energy-saving mode)
<b>Charging Time</b>	8h(AM 1.5, 1000W/m <sup>2</sup> ,25°C)
<b>Material</b>	6063 Aluminum, PC
<b>Working Temperature</b>	25°C~55°C
<b>Protection Grade</b>	Ip65
<b>Product Size</b>	Φ515*415mm
<b>Package Size</b>	570*570*500mm
<b>Number of Packing</b>	1 set/carton
<b>Net Weight</b>	6.4KG
<b>Gross Weight</b>	8.2KG
<b>Diameter of Mounted Lamppost</b>	76mm
<b>Control Mode</b>	Light Control + Time Control
<b>Package Quantity</b>	176 sets/20GP, 400 sets/40HQ


Suggest Hight

2.5m~3m

ORBIX

12  
Watts

SLL-017B



### PARAMETERS

ITEM NO

GLS-7217BX

<b>Solar Panel</b>	18V/28W Monocrystalline Solar Panel. Grade A
<b>LED</b>	12W, 10*18mil Epistar Chip
<b>Lifespan of LED</b>	More than 50,000 hours
<b>Luminous Flux</b>	1200lm~1320lm
<b>Color Temperature</b>	3500~7500K
<b>Beam Angle</b>	120°
<b>Battery</b>	12V/12AH Li-ion Lithium Battery 12.8V/10AH LiFePO4 Lithium Battery
<b>Discharging Time</b>	18h (100% power) 42h(energy-saving mode)
<b>Charging Time</b>	8h(AM 1.5, 1000W/m <sup>2</sup> ,25°C)
<b>Material</b>	6063 Aluminum, PC
<b>Working Temperature</b>	-25°C~55°C
<b>Protection Grade</b>	Ip65
<b>Product Size</b>	Φ515*415mm
<b>Package Size</b>	570*570*500mm
<b>Number of Packing</b>	1 set/carton
<b>Net Weight</b>	7KG
<b>Gross Weight</b>	8.8KG
<b>Diameter of Mounted Lamppost</b>	76mm
<b>Control Mode Light</b>	Control + Time Control
<b>Package Quantity</b>	176 sets/20GP, 400 sets/40HQ

Suggest Hight

2.5m~3m




IP 65



IP 65



## Solar Garden Light



12  
Watts



ORBIX



### PARAMETERS

#### ITEM NO


GLS-7218X

<b>Solar Panel</b>	18V/28W Monocrystalline Solar Panel. Grade A
<b>LED</b>	12W, 10*18mil Epistar Chip
<b>Lifespan of LED</b>	More than 50,000 hours
<b>Luminous Flux</b>	1200lm~1320lm
<b>Color Temperature</b>	3500~7500K
<b>Beam Angle</b>	120°
<b>Battery</b>	12V/14AH Li-ion Lithium Battery 12.8V/12AH LiFePO4 Lithium Battery
<b>Discharging Time</b>	18h(100% Power) 42h(energy-saving mode)
<b>Charging Time</b>	9h(AM 1.5, 1000W/m <sup>2</sup> , 25°C)
<b>Material</b>	6063 Aluminum, PC
<b>Working Temperature</b>	25°C~55°C
<b>Protection Grade</b>	Ip65
<b>Product Size</b>	Φ515*720mm
<b>Package Size</b>	570*570*780mm
<b>Number of Packing</b>	1 set/carton
<b>Net Weight</b>	7.1KG
<b>Gross Weight</b>	9.0KG
<b>Diameter of Mounted Lamppost</b>	76mm
<b>Control Mode</b>	Light Control + Time Control
<b>Package Quantity</b>	120 sets/20GP, 240 sets/40HQ

Suggest Hight

2.5m~3m

12  
Watts



### PARAMETERS

#### ITEM NO

GLS-7222X

<b>Solar Panel</b>	18V/28W Monocrystalline Solar Panel. Grade A
<b>LED</b>	12W, 10*18mil Epistar Chip
<b>Lifespan of LED</b>	More than 50,000 hours
<b>Luminous Flux</b>	1200lm~1320lm
<b>Color Temperature</b>	3500~7500K
<b>Beam Angle</b>	120°
<b>Battery</b>	12V/12AH Li-ion Lithium Battery 12.8V/10AH LiFePO4 Lithium Battery
<b>Discharging Time</b>	18h (100% power) 42h(energy-saving mode)
<b>Charging Time</b>	8h(AM 1.5, 1000W/m <sup>2</sup> , 25°C)
<b>Material</b>	6063 Aluminum, PC
<b>Working Temperature</b>	-25°C~55°C
<b>Protection Grade</b>	Ip65
<b>Product Size</b>	Φ500*550mm
<b>Package Size</b>	570*570*600mm
<b>Number of Packing</b>	1 set/carton
<b>Net Weight</b>	7.1KG
<b>Gross Weight</b>	8.9KG
<b>Diameter of Mounted Lamppost</b>	76mm
<b>Control Mode Light</b>	Control + Time Control
<b>Package Quantity</b>	144 sets/20GP, 304 sets/40HQ

Suggest Hight

2.5m~3m



IP 65




IP 65



## Solar Garden Light

12  
Watts



### PARAMETERS

#### ITEM NO

GLS-7223X



<b>Solar Panel</b>	18V/28W Monocrystalline Solar Panel. Grade A
<b>LED</b>	12W, 10*18mil Epistar Chip
<b>Lifespan of LED</b>	More than 50,000 hours
<b>Luminous Flux</b>	1200lm~1320lm
<b>Color Temperature</b>	3500~7500K
<b>Beam Angle</b>	120°
<b>Battery</b>	12V/12AH Li-ion Lithium Battery    12.8V/10AH LiFePO4 Lithium Battery
<b>Discharging Time</b>	18h (100% power) 42h(energy-saving mode)
<b>Charging Time</b>	8h(AM 1.5, 1000W/m <sup>2</sup> ,25°C)
<b>Material</b>	6063 Aluminum, PC
<b>Working Temperature</b>	25°C~55°C
<b>Protection Grade</b>	Ip65
<b>Product Size</b>	Φ500*600mm
<b>Package Size</b>	570*570*660mm
<b>Number of Packing</b>	1 set/carton
<b>Net Weight</b>	8.7KG
<b>Gross Weight</b>	10.6KG
<b>Diameter of Mounted Lamppost</b>	76mm
<b>Control Mode</b>	Light Control + Time Control
<b>Package Quantity</b>	128 sets/20GP, 272 sets/40HQ

Suggest Hight

2.5m~3m

ORBIX

12  
Watts

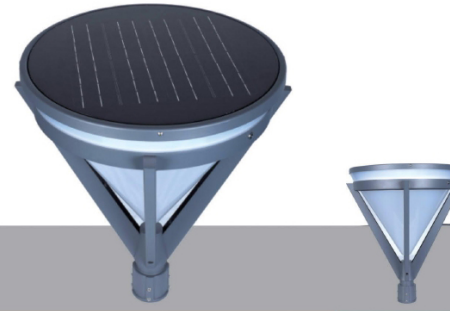

### PARAMETERS

#### ITEM NO

GLS-7224X

<b>Solar Panel</b>	18V/28W Monocrystalline Solar Panel. Grade A
<b>LED</b>	12W, 10*18mil Epistar Chip
<b>Lifespan of LED</b>	More than 50,000 hours
<b>Luminous Flux</b>	1200lm~1320lm
<b>Color Temperature</b>	3500~7500K
<b>Beam Angle</b>	120°
<b>Battery</b>	12V/14AH Li-ion Lithium Battery    12.8V/12AH LiFePO4 Lithium Battery
<b>Discharging Time</b>	18h (100% power) 42h(energy-saving mode)
<b>Charging Time</b>	9h(AM 1.5, 1000W/m <sup>2</sup> ,25°C)
<b>Material</b>	6063 Aluminum, PC
<b>Working Temperature</b>	-25°C~55°C
<b>Protection Grade</b>	Ip65
<b>Product Size</b>	Φ540*620mm
<b>Package Size</b>	570*570*660mm
<b>Number of Packing</b>	1 set/carton
<b>Net Weight</b>	8.2KG
<b>Gross Weight</b>	10.1KG
<b>Diameter of Mounted Lamppost</b>	76mm
<b>Control Mode Light</b>	Control + Time Control
<b>Package Quantity</b>	128 sets/20GP, 256 sets/40HQ

Suggest Hight

2.5m~3m




IP 65



IP 65



## Solar Garden Light



12  
Watts

ORBIX



### PARAMETERS


#### ITEM NO

GLS-7225X

<b>Solar Panel</b>	18V/28W Monocrystalline Solar Panel. Grade A
<b>LED</b>	12W, 10*18mil Epistar Chip
<b>Lifespan of LED</b>	More than 50,000 hours
<b>Luminous Flux</b>	1200lm~1320lm
<b>Color Temperature</b>	3500~7500K
<b>Beam Angle</b>	120°
<b>Battery</b>	12V/14AH Li-ion Lithium Battery 12.8V/12AH LiFePO4 Lithium Battery
<b>Discharging Time</b>	18h (100% power) 42h(energy-saving mode)
<b>Charging Time</b>	9h(AM 1.5, 1000W/m <sup>2</sup> ,25°C)
<b>Material</b>	6063 Aluminum, PC
<b>Working Temperature</b>	-25°C~55°C
<b>Protection Grade</b>	Ip65
<b>Product Size</b>	Φ510*600mm
<b>Package Size</b>	570*570*690mm
<b>Number of Packing</b>	1 set/carton
<b>Net Weight</b>	8.5KG
<b>Gross Weight</b>	10.4KG
<b>Diameter of Mounted Lamppost</b>	76mm
<b>Control Mode</b>	Light Control + Time Control
<b>Package Quantity</b>	128 sets/20GP, 272 sets/40HQ

Suggest Hight  
2.5m~3m

12  
Watts



### PARAMETERS

#### ITEM NO

GLS-7226X

<b>Solar Panel</b>	18V/28W Monocrystalline Solar Panel. Grade A
<b>LED</b>	12W, 10*18mil Epistar Chip
<b>Lifespan of LED</b>	More than 50,000 hours
<b>Luminous Flux</b>	1200lm~1320lm
<b>Color Temperature</b>	3500~7500K
<b>Beam Angle</b>	120°
<b>Battery</b>	12V/14AH Li-ion Lithium Battery 12.8V/12AH LiFePO4 Lithium Battery
<b>Discharging Time</b>	18h (100% power) 42h(energy-saving mode)
<b>Charging Time</b>	9h(AM 1.5, 1000W/m <sup>2</sup> ,25°C)
<b>Material</b>	6063 Aluminum, PC
<b>Working Temperature</b>	-25°C~55°C
<b>Protection Grade</b>	Ip65
<b>Product Size</b>	Φ510*750*250mm
<b>Package Size</b>	780*570*300mm
<b>Number of Packing</b>	1 set/carton
<b>Net Weight</b>	8.4KG
<b>Gross Weight</b>	10.3KG
<b>Diameter of Mounted Lamppost</b>	76mm
<b>Control Mode Light</b>	Control + Time Control
<b>Package Quantity</b>	196 sets/20GP, 469 sets/40HQ

Suggest Hight  
2.5m~3m



IP 65




IP 65



## Solar Garden Light

12  
Watts



### PARAMETERS

#### ITEM NO

GLS-7227X


<b>Solar Panel</b>	18V/28W Monocrystalline Solar Panel. Grade A
<b>LED</b>	12W, 10*18mil Epistar Chip
<b>Lifespan of LED</b>	More than 50,000 hours
<b>Luminous Flux</b>	1200lm~1320lm
<b>Color Temperature</b>	3500~7500K
<b>Beam Angle</b>	120°
<b>Battery</b>	12V/14AH Li-ion Lithium Battery 12.8V/12AH LiFePO4 Lithium Battery
<b>Discharging Time</b>	18h (100% power) 42h(energy-saving mode)
<b>Charging Time</b>	9h(AM 1.5, 1000W/m <sup>2</sup> ,25°C)
<b>Material</b>	6063 Aluminum, PC
<b>Working Temperature</b>	-25°C~55°C
<b>Protection Grade</b>	Ip65
<b>Product Size</b>	Φ510*565mm
<b>Package Size</b>	570*570*620mm
<b>Number of Packing</b>	1 set/carton
<b>Net Weight</b>	8.3KG
<b>Gross Weight</b>	10.6KG
<b>Diameter of Mounted Lamppost</b>	76mm
<b>Control Mode</b>	Light Control + Time Control
<b>Package Quantity</b>	144 sets/20GP, 304 sets/40HQ

Suggest Hight

2.5m~3m

ORBIX

12  
Watts



### PARAMETERS

#### ITEM NO

GLS-7228X

<b>Solar Panel</b>	18V/28W Monocrystalline Solar Panel. Grade A
<b>LED</b>	12W, 10*18mil Epistar Chip
<b>Lifespan of LED</b>	More than 50,000 hours
<b>Luminous Flux</b>	1200lm~1320lm
<b>Color Temperature</b>	3500~7500K
<b>Beam Angle</b>	120°
<b>Battery</b>	12V/14AH Li-ion Lithium Battery 12.8V/12AH LiFePO4 Lithium Battery
<b>Discharging Time</b>	18h (100% power) 42h(energy-saving mode)
<b>Charging Time</b>	9h(AM 1.5, 1000W/m <sup>2</sup> ,25°C)
<b>Material</b>	6063 Aluminum, PC
<b>Working Temperature</b>	-25°C~55°C
<b>Protection Grade</b>	Ip65
<b>Product Size</b>	Φ510*680mm
<b>Package Size</b>	570*570*750mm
<b>Number of Packing</b>	1 set/carton
<b>Net Weight</b>	8.5KG
<b>Gross Weight</b>	11.2KG
<b>Diameter of Mounted Lamppost</b>	76mm
<b>Control Mode Light</b>	Control + Time Control
<b>Package Quantity</b>	120 sets/20GP, 240 sets/40HQ

Suggest Hight

2.5m~3m



IP 65



IP 65



## Solar Garden Light

ORBIX

12  
Watts



Diameter of lamppost, 76mm, Unit mm



### PARAMETERS

#### ITEM NO


GLS-7229X

<b>Solar Panel</b>	18V/28W Monocrystalline Solar Panel. Grade A
<b>LED</b>	12W, 10*18mil Epistar Chip
<b>Lifespan of LED</b>	More than 50,000 hours
<b>Luminous Flux</b>	1320lm~1440lm
<b>Color Temperature</b>	3000~7000K
<b>Beam Angle</b>	120°
<b>Battery</b>	12V/12AH Li-ion Lithium Battery 12.8V/10AH LiFePO4 Lithium Battery
<b>Discharging Time</b>	18h (100% power) 42h(energy-saving mode)
<b>Charging Time</b>	8h(AM 1.5, 1000W/m <sup>2</sup> ,25°C)
<b>Material</b>	6063 Aluminum, PC
<b>Working Temperature</b>	-25°C~55°C
<b>Protection Grade</b>	Ip65
<b>Product Size</b>	Φ510*530mm
<b>Package Size</b>	570*570*600mm
<b>Number of Packing</b>	1 set/carton
<b>Net Weight</b>	7.6KG
<b>Gross Weight</b>	9.8KG
<b>Diameter of Mounted Lamppost</b>	76mm
<b>Control Mode</b>	Light Control+Time Control
<b>Package Quantity</b>	144 sets/20GP, 320 sets/40HQ

Suggest Hight

2.5m~3m

12  
Watts



Diameter of lamppost, 76mm, Unit mm



### PARAMETERS

#### ITEM NO

GLS-7230X

<b>Solar Panel</b>	18V/28W Monocrystalline Solar Panel. Grade A
<b>LED</b>	12W, 10*18mil Epistar Chip
<b>Lifespan of LED</b>	More than 50,000 hours
<b>Luminous Flux</b>	1320lm~1440lm
<b>Color Temperature</b>	3500~7500K
<b>Beam Angle</b>	120°
<b>Battery</b>	12V/12AH Li-ion Lithium Battery 12.8V/10AH LiFePO4 Lithium Battery
<b>Discharging Time</b>	18h (100% power) 42h(energy-saving mode)
<b>Charging Time</b>	8h(AM 1.5, 1000W/m <sup>2</sup> ,25°C)
<b>Material</b>	6063 Aluminum, PC
<b>Working Temperature</b>	-25°C~55°C
<b>Protection Grade</b>	Ip65
<b>Product Size</b>	465*465*425mm
<b>Package Size</b>	480*480*480mm
<b>Number of Packing</b>	1 set/carton
<b>Net Weight</b>	8.0KG
<b>Gross Weight</b>	9.8KG
<b>Diameter of Mounted Lamppost</b>	76mm
<b>Control Mode Light</b>	Control + Time Control
<b>Package Quantity</b>	192sets/20GP, 480 sets/40HQ

Suggest Hight

2.5m~3m



IP 65



IP 65

